

Y-SERIES GRINDERS

PRODUCT CATEGORY



COMPACTION



GENERATORS



BUGGIES



TROWELS



SCREED



SPREADERS



SAWS



BARTELL

Innovatech

SPE


morrison

PRECISION METAL WORKS

CONTEC NORTH AMERICA



MIXERS



DIAMOND BLADES



FLOOR REMOVAL



SCARIFIERS



SHOTBLASTERS



GRINDERS & POLISHERS



TOOLING & CONSUMABLES




BARTELLGLOBAL.COM

FEATURES AND BENEFITS



COMPLETE LINE

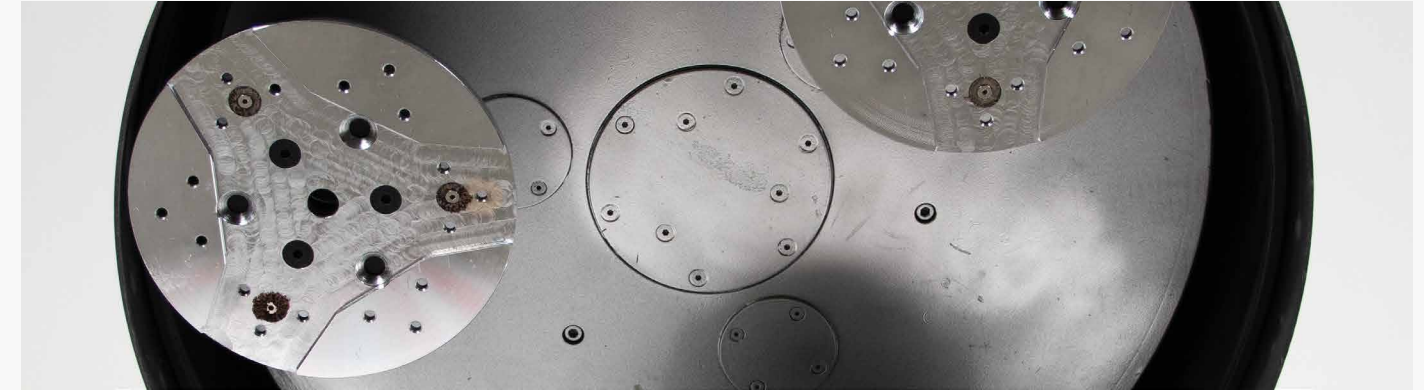

P550Y



P650Y



P750Y

TECHNICAL SPECS

Voltage	220V single phase	220V single phase	480V 3 phase
Power Output	5HP (3.7Kw)	10HP (7.5Kw)	15HP (11.2Kw)
Power Frequency	50/60HZ	50Hz/60Hz	50Hz/60Hz
Twist Lock Plug	30Amp NEMA L6-30P	50Amp CS8265C	50Amp CS8265C
Motor Speed	0 - 1800rpm	0 - 1800rpm	0 - 1800rpm
Grinding Head Speed	0 - 1500rpm	0 - 1800rpm	0 - 1800rpm
Planetary Plate Speed	0 - 540rpm	0 - 350rpm	0 - 380rpm
Display	LED Digital RPM	LED Digital RPM	LED Digital RPM
Drive	Steel Gear	Steel Gear	Steel Gear
Grinding width	21.7" (550mm)	25.7" (650mm)	29.5" (750mm)
Head diameter	9" (230mm)	9.8" (250mm)	9.8" (250mm)
Grinding Heads	3	3	3
Water-tank	7.9 gal (30L)	7.9 gal (30L)	7.9 gal (30L)
Vacuum Port	2" (50mm)	2" (50mm)	2" (50mm)
Outside (LxWxH)	38.2"x21.7"x33.5" 970x550x850 (mm)	38.2"x25.7"x37.4" 970x650x950mm	38.2"x29.5"x41.3" 970x750x1050mm
Weight	369 lbs (180kg)	660 lbs (300kg)	726 lbs (330kg)