




## TWO-STAGE HEPA FILTER SYSTEM WITH VARIABLE SUCTION STRENGTH

- The HD3 is a three-motor HEPA dust extractor, that features a two-stage filtering system comprised of a main conical filter and two HEPA filters
- Remove at least 99.97% of airborne particles 0.3 micrometers ( $\mu\text{m}$ ) in diameter
- 3 individual motor switches for variable suction
- "Reverse-air" jet-pulse filter cleaning system effectively cleans and removes dust build-up on the filters
- Easy-to-use inlet closure door eliminates the need to remove hoses when pulsing and cleaning filters
- Equipped with a continuous-bag disposal system for effective dust collecting

**INCLUDES  
FLOOR  
WAND  
& HOSE**

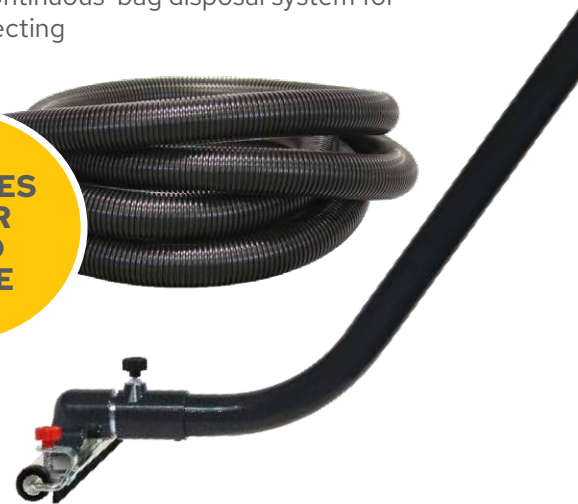

### TECHNICAL SPECS

Voltage	120	230
AMPS	16	12
Inlet Diameter	2.5" (63mm)	
Power Output	3.2 hp	4.8 hp
Air Flow	288 cfm	356 cfm
Water lift	74"	90"
Pre-filter (F8) >99.5% @1.0um	48 ft <sup>2</sup> (3m <sup>2</sup> )	
HEPA Filter (H13) >99.99% @0.3um	39 ft <sup>2</sup> (3.6m <sup>2</sup> )	
Length	31" (78cm)	
Width	23" (59cm)	
Height	58" (146cm)	
Weight	149 lbs (68kg)	141 lbs (64kg)

### COMPLETE LINE

